


## Heavy Duty Anodised Aluminium Profiles

<b>Product</b>	Aluminium Minimalist 10x54mm
<b>Material</b>	Anodised Aluminium with Silicon Carbide Insert
<b>Size</b>	Cut-to-size up to 5m
<b>Substrates</b>	Timber, Concrete, Tiles, Vinyl, Thin Carpet
<b>Standards</b>	National Construction Code D2.13 and D2.14
<b>Warranty</b>	Guaranteed for 2 Years

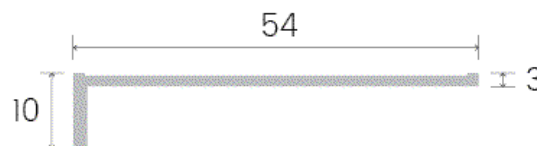

### Slip Resistant Testing

<b>AS/NZS 4586:2013</b>	OIL - WET Ramp Analysis	Mean overall acceptance angle = 35.5°	Class R13
<b>AS/NZS 4586:2013</b>	WET Pendulum Analysis	Slip Resistance Value (SRV) = 72	Class P5

### Guardian Colour and Stock Codes

Insert Colour	Application	Clear Anodised	Black Anodised
<b>Black</b>	Internal and External	GSN-02MS10-CBK	GSN-02MB10-CBK
<b>Grey</b>	Internal and External	GSN-02MS10-CMG	GSN-02MB10-CMG
<b>Yellow</b>	Internal and External	GSN-02MS10-CYL	GSN-02MB10-CYL
<b>Ivory</b>	Internal and External	GSN-02MS10-CIV	GSN-02MB10-CIV
<b>Blue</b>	Internal and External	GSN-02MS10-CBL	GSN-02MB10-CBL
<b>Red</b>	Internal and External	GSN-02MS10-CRD	GSN-02MB10-CRD
<b>Orange</b>	Internal and External	GSN-02MS10-COG	GSN-02MB10-COG

### Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosing to contrast against the base surface is as follow:

- The contrasting colour strip shall have a minimum contrast of 30% against the substrate.
- The contrasting colour strip shall be a continuous 50mm–75mm wide.