





## Heavy Duty Anodised Aluminium Profiles

Product	Guardian Non-Slip Stair Nosing
Material	Anodised Aluminium with Silicon Carbide Insert Tape
Size	Cut-to-size up to 5.8m
Substrates	Timber, Concrete, Tiles, Vinyl, Rubber, Pavers, Thin Carpet (Not suitable for carpet with underlay)
Standards	National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 *
Warranty	Guaranteed for 5 Years

### Bullnose with a Ramp Back (80 x 30mm)

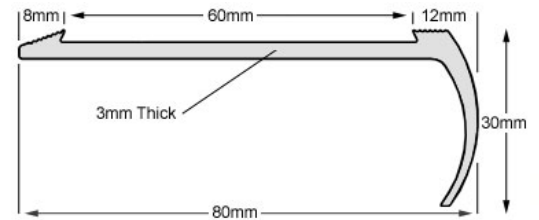

### Slimline with a Ramp Back (80 x 10mm) \*



## Slip Resistant Testing

AS/NZS 4586:2013	OIL - WET Ramp Analysis	Mean overall acceptance angle = 35.5°	Class R13
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 72	Class P5

## Guardian Colour and Stock Codes

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back
Black	Internal and External	GSN-BNR-CBK	GSN-SLR-CBK
Safety Yellow	Internal and External	GSN-BNR-CYL	GSN-SLR-CYL
Medium Grey	Internal and External	GSN-BNR-CMG	GSN-SLR-CMG

## Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosing's to contrast against the base surface is as follow:

- The contrasting colour strip shall have a minimum contrast of 30% against the substrate.
- The contrasting colour strip shall be a continuous 50mm–75mm wide