



Heavy Duty Anodised Aluminium Profiles

| | |
|------------|--|
| Product | Guardian Non-Slip Stair Nosing |
| Material | Anodised Aluminium with Various Insert Tapes |
| Substrates | Timber, Concrete, Tiles, Vinyl, Rubber, Carpet, Pavers |
| Standards | National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 * |
| Warranty | Guaranteed for 5 Years |

Bullnose with a Ramp Back (80 x 30mm)

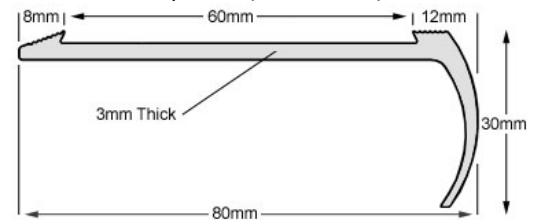

Slimline with a Ramp Back (80 x 10mm) *



Guardian Colour and Stock Codes – [Supplied with Silicon Carbide Tape]

| Colours | Application | Bullnose - Ramp Back | Slimline - Ramp Back |
|---------------|-----------------------|----------------------|----------------------|
| Black | Internal and External | GSN-BNR-CBK | GSN-SLR-CBK |
| Safety Yellow | Internal and External | GSN-BNR-CYL | GSN-SLR-CYL |
| Medium Grey | Internal and External | GSN-BNR-CMG | GSN-SLR-CMG |

Guardian Colour and Stock Codes – [Supplied with Polyurethane Tape]

| Colours | Application | Bullnose - Ramp Back | Slimline - Ramp Back |
|---------------|-------------------|----------------------|----------------------|
| Black | Internal Use Only | GSN-BNR-PBK | GSN-SLR-PBK |
| Safety Yellow | Internal Use Only | GSN-BNR-PYL | GSN-SLR-PYL |
| Terracotta | Internal Use Only | GSN-BNR-PTR | GSN-SLR-PTR |

Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosing's to contrast against the base surface is as follow:

- The contrasting colour strip shall have a minimum contrast of 30% against the substrate.
- The contrasting colour strip shall be a continuous 50mm–75mm wide