


# Tactile Ground Surface Indicators

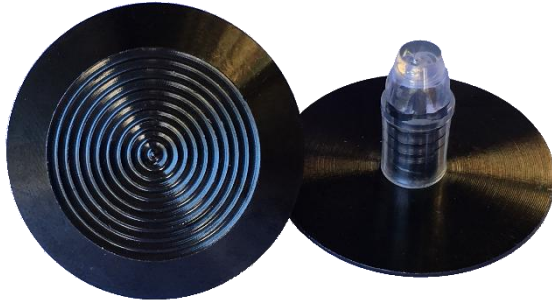

Discrete Warning Tactile

### Tactile Dimensions

Square Metre Ratio	400 studs per 1m <sup>2</sup>
--------------------	-------------------------------

### Dome Dimensions

Top of Dome	25mm
Bottom of Dome	35mm
Thickness of Dome	5mm

Range	Guardian Discrete Tactile Ground Surface Indicator
Material	High Quality - 316 Marine Grade Stainless Steel with Black PVD Coating
Substrates	Concrete, Granite, Vinyl, Carpet Tiles
Installation	Plug & Tap Pressure Fitted Design
Standards	Complies with the National Construction Code D3.8 - Building Code of Australia Complies with and Manufactured to Australian Standards AS/NZS 1428.4.1-2009 Complies to Australian Standards AS/NZS 1428.1-2009 Complies to Australian Standards AS/NZS 4586-2013
Warranty	Guaranteed for 5 Years

### Slip Resistant Testing

AS/NZS 4586-2013	OIL - WET Ramp Analysis	Class R12
AS/NZS 4586-2013	WET Pendulum Analysis	Class P5

### Guardian Colour and Stock Codes

Colours	Application	Stem Width	Stem Length	Stock Codes
Black	Internal and External	8.5mm plug	18mm plug	GTS818P-PVDBK

### Luminance Contrast Requirements

<p>The National Construction Code of Australia and the AS/NZS 1428.4.1 require a minimum luminance contrast.</p> <p>The luminance guidelines for TGSI's to contrast against the base surface is as follows:</p> <ul style="list-style-type: none"> <li>- the raised section shall have a minimum contrast of 45% when constructed of one material/colour</li> <li>- the raised section shall have a minimum contrast of 60% when constructed of two materials/colours</li> </ul>
--