Tactile Ground Surface Indicators

Guardian Tactile Systems Pty Ltd

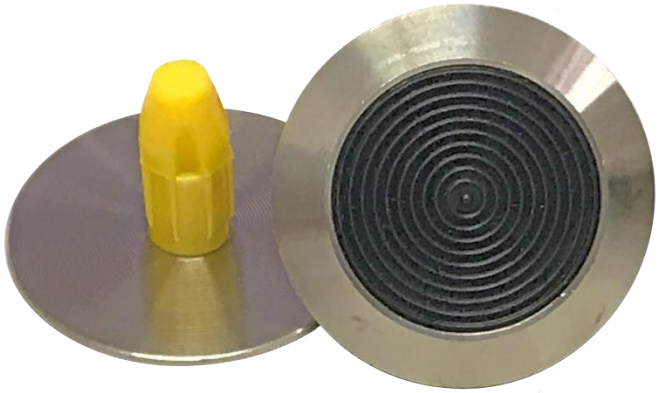

Solid 316 Stainless Steel Discrete Tactile with Black Polyurethane Insert 18mm Pressure Fit

Tactile Dimensions	
Square Metre Ratio	400 studs per $1m^2$

Dome Dimensions	
Top of Dome	25mm
Bottom of Dome	35mm
Height of Dome	5mm

Range	Guardian Discrete Tactile Ground Surface Indicator
Material	High Quality - 316 Marine Grade Stainless Steel with Black TPU Insert
Substrates	Concrete, Granite, Vinyl, Carpet Tiles
Installation	Plug & Tap Pressure Fitted Design
Standards	Complies with National Construction Code - Building Code of Australia D3.8 Manufactured to comply with Australian Standards AS/NZS 1428.4.1-2009 Manufactured to comply with Australian Standards AS/NZS 4586-2013
Warranty	**Guaranteed for 2 Years**

Slip Resistant Testing		
AS/NZS 4586:2013	OIL - WET Ramp Analysis	Class R12
AS/NZS 4586:2013	WET Pendulum Analysis	Class P5

Guardian Colour and Stock Codes				
Colours	**Application**	**Stem Width**	**Stem Length**	**Stock Codes**
Black	Internal and External	8.5mm plug	18mm	GTS818P-316TPUBK

Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NZS 1428.4.1 require a minimum luminance contrast.

The luminance guidelines for TGSI's to contrast against the base surface is as follows:

The raised section shall have a minimum contrast of 60% when constructed of two materials/colours

Durable & UV Resistant, Versatile, Premium Quality