



Guardian Stair Nosing Systems

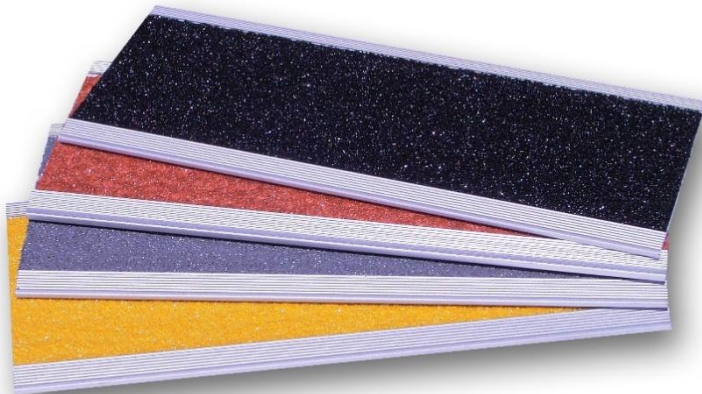


Product	Guardian Non Slip Stair Nosing
Material	Anodised aluminium with silicon carbide insert tape
Substrates	Timber, concrete, bitumen, tiles, vinyl, rubber, carpet
Standards	National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 *
Warranty	Guardian Stair Nosing is Guaranteed for 5 Years

Heavy Duty Anodised Aluminium Profiles


Bullnose with a Ramp Back (80 x 30mm)

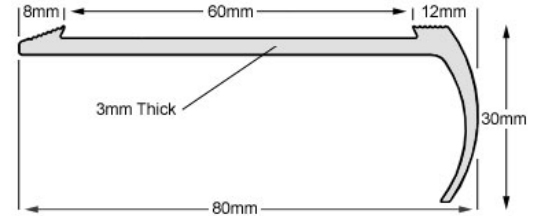

Slimline with a Ramp Back (80 x 10mm) *



Slimline with a Recessed Back (75 x 10mm) *



- profile is suitable for a 72mm recess

Slip Resistant Testing

AS/NZS 4586:2013	OIL - WET Ramp Analysis	Mean overall acceptance angle = 35.5°	Class R13
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 72	Class P5

Guardian Colour and Stock Codes

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back	Slimline - Recess Back
Black	Internal and External	GSN-BNR-CBK	GSN-SLR-CBK	GSN-SLS-CBK
Safety Yellow	Internal and External	GSN-BNR-CYL	GSN-SLR-CYL	GSN-SLS-CYL
Medium Grey	Internal and External	GSN-BNR-CMG	GSN-SLR-CMG	GSN-SLS-CMG
Terracotta	Internal Use Only	GSN-BNR-CTR	GSN-SLR-CTR	

